

7 Station Sports Series Metal Swing Set with Basketball and Soccer



OWNER'S MANUAL

8452.3-103117

CAUTION: This unit is designed to be used safetly by children between the ages of 3 to 8 years old. This product has a maximum weight limit of 80 lbs per station. Glider swing can hold up to 1 child per seat. Trampoline can hold up to 1 child at a time. Slide can hold up to 1 child at a time. Nest swing can hold 2 children up to a maximum weight of 80 lbs.



PLEASE DO NOT RETURN THIS PRODUCT TO THE STORE.

STOP. Contact customer service if you have any questions regarding assembly or proper operation of the machine.

Email us at:

Service@paradigmhw.com

Or call us at:

1-844-641-7920

Hours:

8:00 am to 5:00 pm (PST) Daily

TABLE OF CONTENTS

LABEL PLACEMENT	2
LABEL PLACEWIEN I	
SAFETY	3
OVERVIEW DRAWING	4
PARTS	5
TOOLS REQUIRED FOR ASSEMBLY	14
GROUND ANCHOR INSTALLATION	15
ASSEMBLY INSTRUCTIONS	17
WARRANTY	24
PARTS REQUEST FORM	35

SERVICE

IMPORTANT: FOR NORTH AMERICA ONLY

For damaged or defective product, questions, replacement parts or any other service support, please contact our customer service department by the below methods:

For The Best Service, please Email:

service@paradigmhw.com

Response Time: 1-2 Business Days

Emailing us with the information above will be the best method to receive a response during peak business hours

Website:

www.paradigmhw.com

Toll-Free:

1-844-641-7920

(8:00 AM - 5:00 PM Pacific Standard Time, Daily)

Response time may vary via calling

Please have the following information ready when requesting for service:


- Your name
- Phone number
- Model number
- Serial number
- Part number
- Proof of Purchase

For damaged or defective product please contact our customer service before returning to the store.

Paradigm Health & Wellness, Inc.

1189 Jellick Ave.

City of Industry, CA 91748, USA

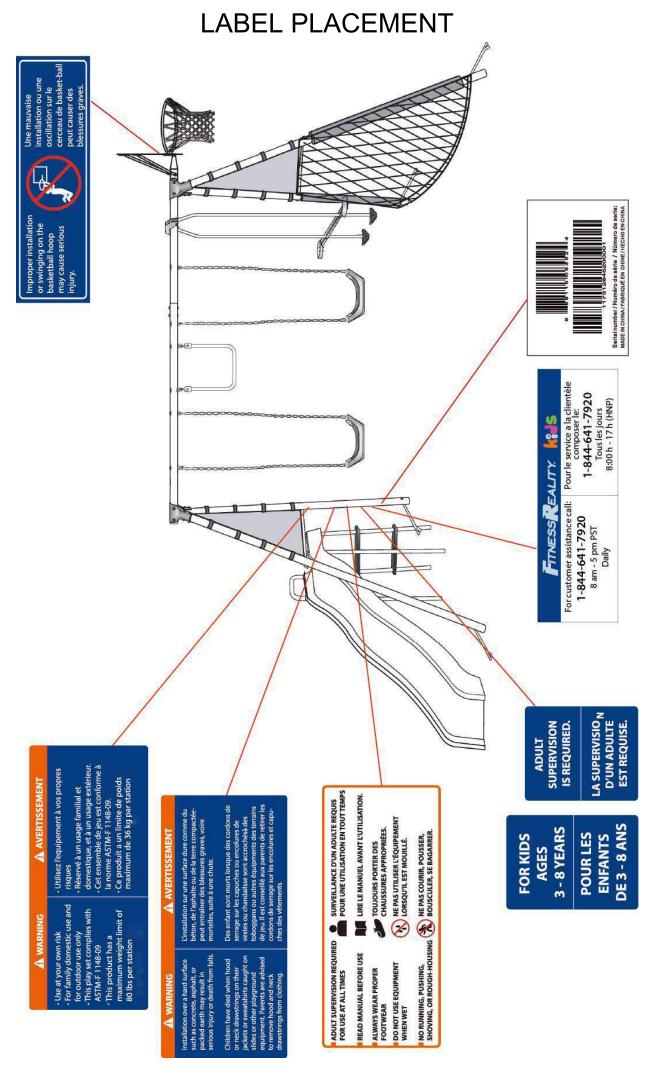


SAFETY

Read all instructions carefully before assembling operating this product. Retain this Owner's manual and keep the original purchase receipt for future reference.

- Before assembling the Fitness Playground, find level ground no less than 6 feet from any structure or obstruction to the Fitness Playground. The Fitness Playground must have clearance on all sides.
- 2. To prevent serious injury, do not allow children to play on the Fitness Playground until it is completely installed.
- 3. Do not install the Fitness Playground over concrete, packed dirt, or any other hard surface. A fall onto a hard surface can result in serious injury.
- 4. Only adults should assemble or disassemble this Fitness Playground.
- 5. This product **MUST** be anchored.
- 6. Adult supervision of children is required at all times when on or around this Fitness Playground. Never leave children unattended.
- 7. Do not swing too high or at an angle.
- 8. Do not hang on or climb from structural members of the Fitness Playground.
- 9. Do not exceed the intended weight limit or maximum number of users for the Fitness Playground.
- 10. This product is intended to be used by children between the ages of 3-8 years old.
- 11. Be sure to observe your children and ensure that they have the strength and skills to enjoy all the rides safely before use on their own.
- 12. Do not allow children to walk close to, behind, or in front of moving items.
- 13. Do not allow children to twist the chains on the swing or loop them over the top bar. This may reduce the strength of the chain.
- 14. Teach and instruct children not to swing empty seats.
- 15. Instruct children how to sit in the center of the seats and swing with their full weight on the seat.
- 16. Warn children not to use the equipment in any manner other than intended.
- 17. Warn children not to get off the rides while in motion.
- 18. Warn children to dress appropriately. Loose fitting clothing is potentially hazardous when using the Fitness Playground.
- 19. Equipment may be slippery when wet. Do not allow children to use the equipment when wet.
- 20. Parents should regularly check openings and surfaces, such as slides, for items that may be hazardous.
- 21. Parents should check swing chains to ensure they are secure and cannot be looped back on themselves.
- 22. Do not place any part of the body near moving parts.
- 23. Never slide head first down the slide.
- 24. Ensure that all swings and chains are secured at both ends.
- 25. Never attach any materials that are not specifically designed for use with this swing set, such as jump ropes, pet leashes, rope or cords and other chains as these pose a potential strangulation hazard.
- 26. Children must be supervised at all times. No playground is safe without adult supervision.
- 27. Improper installation or use of the Basketball Hoop may cause serious injury.

Play Ground Rules

- 1. Do not use equipment when wet.
- 2. No running, pushing, shoving, or roughhousing.
- 3. Do not use play equipment before reading manual.
- 4. Always wear proper footwear.

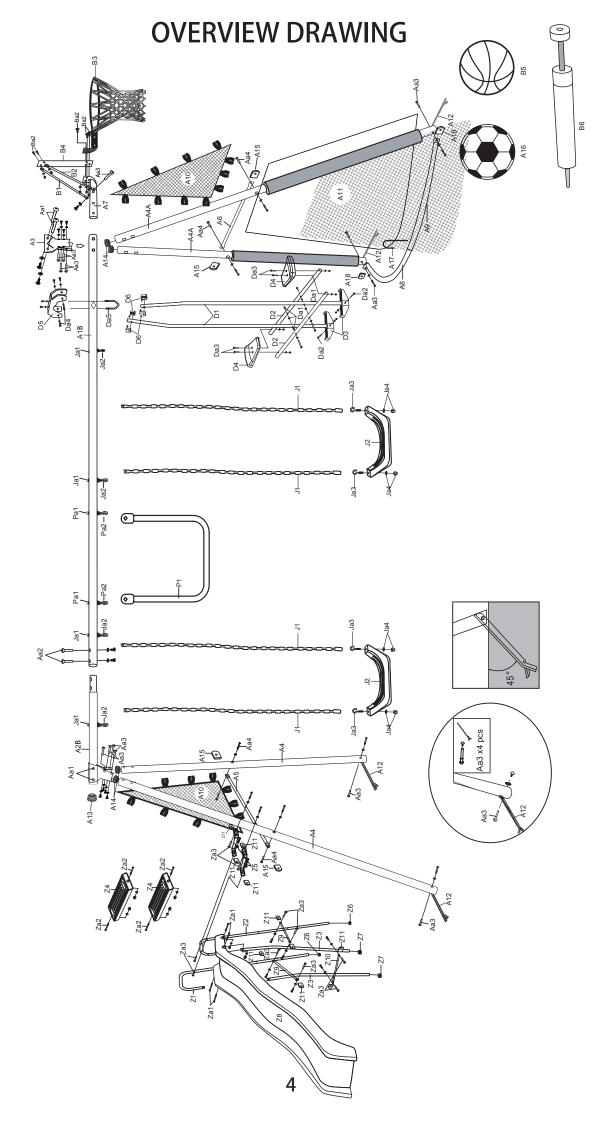

Parts used for main frame assembly

A1B		Top bar	1 PC
A2B		Top bar	1 PC
A3		Top Bar and Legs Support	1 PC
A4	() 0 0 0	Leg	2 PCS
A4A	• •	Padded Leg	2 PCS
A5	•	Slide Mounting Bar	1 PC
A6		Crossbar	1 PC
A7	0 0 0	Basketball Hoop Support Tube	1 PC
A8		Net Bar A	1 PC
A9		Net Bar B	1 PC

Parts used for main frame assembly

	I		
A10		Triangle Net	2 PCS
A11		Soccer net	1 PC
A12		Anchor	4 PCS
A13		Top Bar End Cap (Preassembled)	1 PC
A14		Leg End Cap (Preassembled)	4 PCS
A15	0	Crossbar Cap	4 PCS
A16		Soccer Ball	1 PC
A17		Net Anchor	1 PC
A18		Net Bar Cap	2 PCS

Hardware used for main frame assembly

Aa1		Binder Post & Bolt Set M8x15 Bolt 10x52 Sleeve Nut (2 Sets preassembed)	4 SETS
-----	--	--	--------

Aa2	Binder Post & Bolt Set M8x15 Bolt 10x50 Sleeve Nut	2 SETS
Aa3	Binder Post & Bolt Set M6x12 Bolt 8x48 Sleeve Nut	12 SETS
Aa4	Binder Post & Bolt Set M6x12 Bolt 8x45 Sleeve Nut	4 SETS

Parts used for basketball board assembly

B1	(O) -	Basketball Hoop Support Tube A	1 PC
B2	(O) •	Basketball Hoop Support Tube B	1 PC
В3		Basketball Hoop	1 PC
B4	° °	Basketball backboard	1 PC
B5		Basketball	1 PC
B6	(0)	Air Pump	1 PC

Hardware used for basketball board assembly

Aa3	Binder Post & Bolt Se t M6x12 Bolt 8x48 Sleeve Nut	1 SE T
Ba2	Bolt Set M6x15 Bolt	5 SETS

Parts used for trapeze assembly

P1		Trapeze Tube	1 PC
----	--	-----------------	------

Hardware used for trapeze assembly

Pa1	Bolt Set (Preassembled)	2 SETS
Pa2	Eye Bolt Set (Preassembled)	2 SETS

Parts used for swing seats assembly

J1	Swing Chain (preassembled on the seat)	4 PCS
J2	Swing Seat	2 PCS

Hardware used for swing seats assembly

Ja1	Female Bolt Set (Preassembled)	4 SETS
Ja2	Eye Bolt Set (Preassembled)	4 SETS
Ja3	Screw Hook (Preassembled)	4 PCS
Ja4	Screw Hook C ap Se t (Preassembled)	4 SETS

Parts used for glider assembly

D1		Glider Vertical Pole	2 PCS
D2	0	Glider Horizontal Pole	2 PCS
D3		Foot Rest	2 PCS
D4		Glider Seat	2 PCS
D5		Glider Attachment	1 PC
D6		Glider Vertical Pole Cap	4 PCS

Hardware used for glider assembly

Da1	Binder Post & Bolt Set M6x12 Bolt 8x73 Sleeve Nut	2 SETS
Da2	Bolt Set M6x40 Bolt	2 SETS
Da3	Bolt Set M6x38 Bolt	4 SETS
Da4	Binder Post & Bolt Set M6x12 Bolt 8x40 Sleeve Nut	2 SETS
Da5	Glider Bolt Set 10x30 Sleeve Nut	1 SET

Parts used for slide assembly


Z1		Slide Ladder Support Tube	1 PC
Z2		Slide Ladder Connecting Tube	1 PC
Z3	•	Slide Leg Tube	2 PCS
Z4		Slide Ladder Step	2 PCS
Z5	0	Connecting Plate	2 PCS
Z6		Cap for Z1 and Z2 (Preassembled)	2 PCS
Z 7		Cap for Z3 (Preassembled)	2 PCS
Z8		Slide	1 PC
Z9	0	Slide Ladder Support Tube Cross Bar	2 PCS
Z10	0	Slide Leg Cross Bar	1 PC
Z11		Crossbar Cap	10 PCS

Hardware used for slide assembly

Za1	Bolt Set M6x36 Bolt	4 SETS
Za2	Bolt Set M6x42 Bolt	4 SETS
Za3	Binder Post & Bolt Set M6x12 Bolt 8x24 Sleeve Nut	10 SETS

TOOLS REQUIRED FOR ASSEMBLY


Prepare the following tools prior to assembling this equipment.

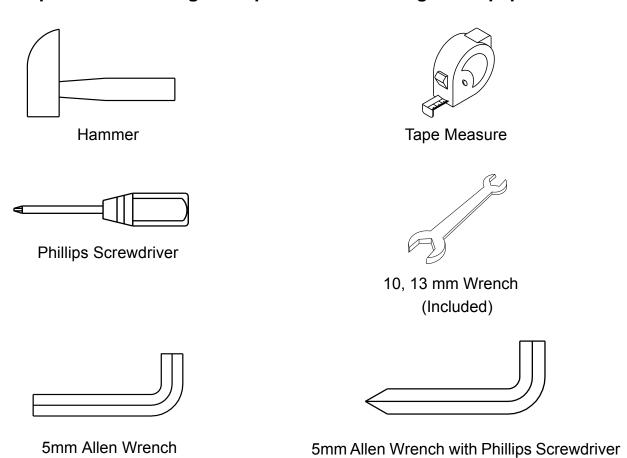

(Included)


(Included)

ANCHOR INSTALLATION

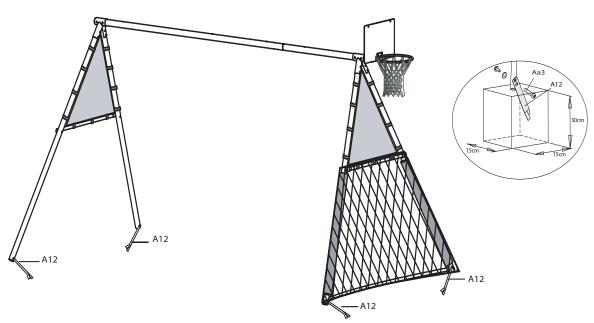

For proper installation, the Anchors (A12) must be cemented into the ground. Dig a 15 \times 15 \times 30 cm hole at each leg. Pour cement into the hole and place the Anchor (A12) at a 5 degree angle, towards the inside of the Playground. Do not use until cement has dried.

Note: The maximum fall height for this product is 6 feet. The minimum ground clearance between the bottom of the lowest swing attachment must be 8 inches.

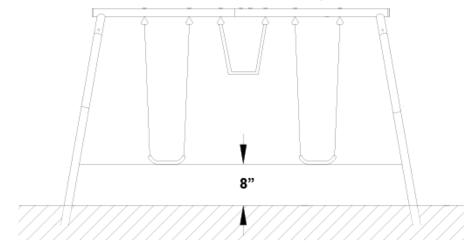

Must keep a minimum 8 inches of space with the soil.

Warning: Please bury the legs of the swing set as per instruction. If the swing set is used without proper anchoring, it may be dangerous and may tilt over.


This play ground received ASTM F2276 and CPSIA certification.

- Place the playground equipment on level ground, not less than 6 feet (1.8 meters) from any structure or obstruction such as a fence, garage, house, overhanging branches, laundry lines, or electrical wires.
- Do not install the playground equipment over concrete, asphalt, packed earth, or any other hard surface. A fall onto a hard surface can result in serious injury to the user.

TIGHTENING NUTS & BOLTS

- Do not over-tighten the nuts and bolts when you are assembling your playground equipment.
 This will allow for some possible adjustments and ease of installation.
- Once you have completed the assembly of the playground equipment, go back over all of the nuts
 and bolts and properly tighten all of them before using the playground equipment.

Main Frame Layout

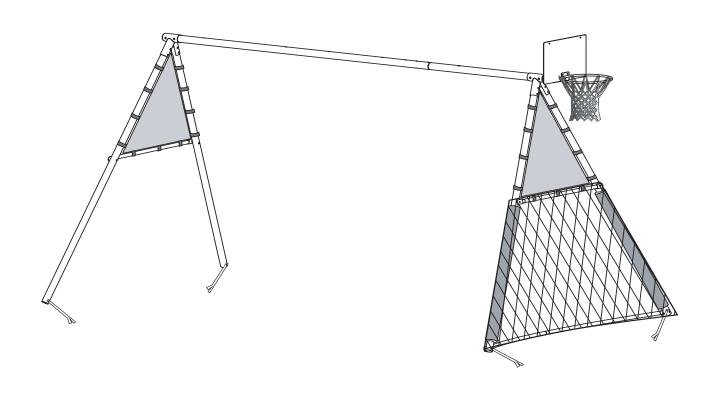



- Place the playground equipment on level ground, no less than 6 feet (1.8 meters) from any structure or obstruction such as, a fence, garage, house, overhanging branches, laundry lines, or electrical wires.
- Do not install the playground equipment over concrete, asphalt, packed earth, or any other hard surface. A fall onto a hard surface can result in serious injury to the user.

TIGHTENING NUTS & BOLTS

- Do not over-tighten the nuts and bolts when you are assembling your playground equipment. This
 will allow for some possible adjustments and ease for installation.
- Once you have completed the assembly of the playground equipment, go back over all the nuts
 and bolts and properly tighten all of them before using the playground equipment.


Main Frame Layout

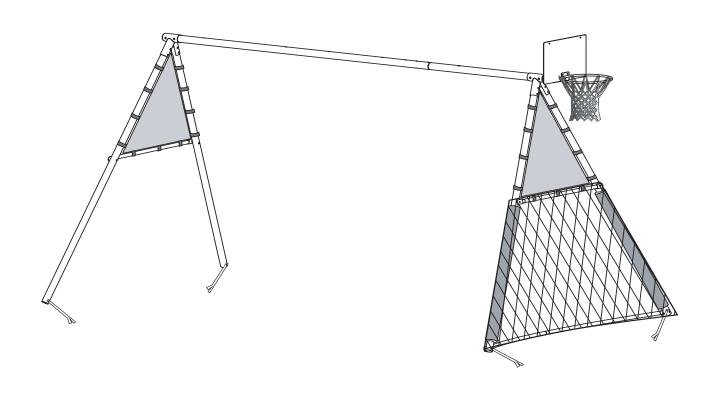

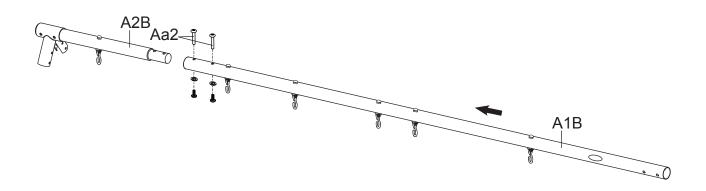

Step 1

Attach the Top Bar (A1B) to the Top Bar (A2B) using two Binder Post and Bolt Sets (Aa2).
 Tighten the Binder Post and Bolt Sets (Aa2) with the 5mm Allen Wrench provided.

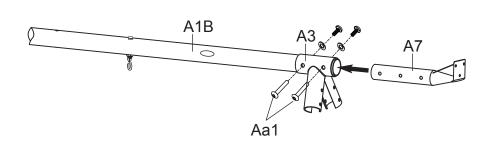


- Slide the Top Bar and Legs Support (A3) over the Top Bar (A1B) and insert the Basketball Hoop Support Tube (A7) into the open end of the Top Bar (A1B). Align the holes and secure with two Binder Post and Bolt Sets (Aa1). Tighten the Binder Post and Bolt Sets (Aa1) with the 5mm Allen Wrench provided.
- NOTE: Ensure that the last bolt hole of the **Basketball Hoop Support Tube (A7)** is outside of the **Top Bar (A1B)** to continue with the next step.


ASSEMBLY B4 Ba2 B3


Step 3

 Secure the Basketball Hoop (B3) to the Basketball Backboard (B4) and Basketball Hoop Support Tube (A7) using three Bolt Sets (Ba2). Tighten the Bolt Sets (Ba2) using the 5mm Allen Wrench and 10, 13 mm Wrench provided.

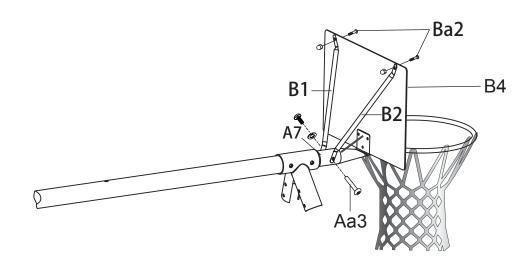


- Attach the Basketball Hoop Support Tube A (B1) and Basketball Hoop Support Tube B (B2) to the Basketball Backboard (B4) using two Bolt Sets (Ba2). Then attach the opposite end of the Basketball Hoop Support Tube A (B1) and Basketball Hoop Support Tube B (B2) to the Basketball Hoop Support Tube (A7) Using one Binder Post and Bolt Set (Aa3).
- Tighten the **Bolt Sets (Ba2)** using the **5mm Allen Wrench** and **10, 13 mm Wrench** provided.
- Tighten the Binder Post and Bolt Set (Aa3) with the 5mm Allen Wrench provided.

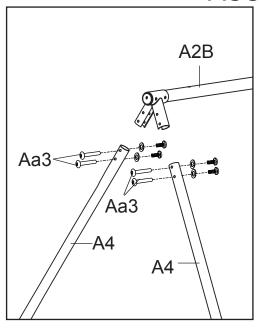

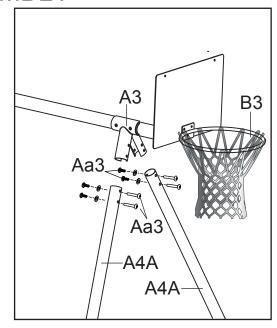


Step 5

- Attach two Legs (A4) to the Top Bar (A2B) using four Binder Post and Bolt Sets (Aa3). On the Opposite side, Attach two Padded Legs (A4A) to the Top Bar and Legs Support (A3) using four Binder Post and Bolt Sets (Aa3). Then tighten all Binder Post and Bolt Sets (Aa3) using the 5mm Allen Wrench provided.
- NOTE: The Padded Legs (A4A) must be installed on the same side as the Basketball Hoop (B3).

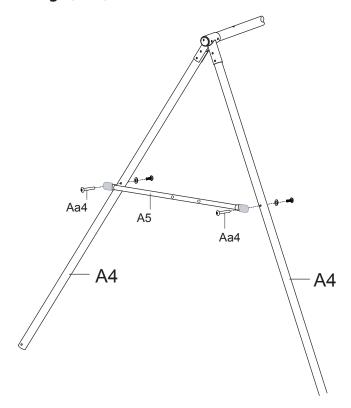


- Connect the Slide Mounting Bar (A5) to the two Legs (A4) using two Binder Post and Bolt Sets (Aa4). Tighten the Binder Post and Bolt Sets (Aa4) using the 5mm Allen Wrench and 5mm Allen Wrench with Phillips Screwdriver provided.
- NOTE: The Slide Mounting Bar (A5) is the bar with 2 holes through the center. This will be used to attach the Slide (Z8) in later steps.

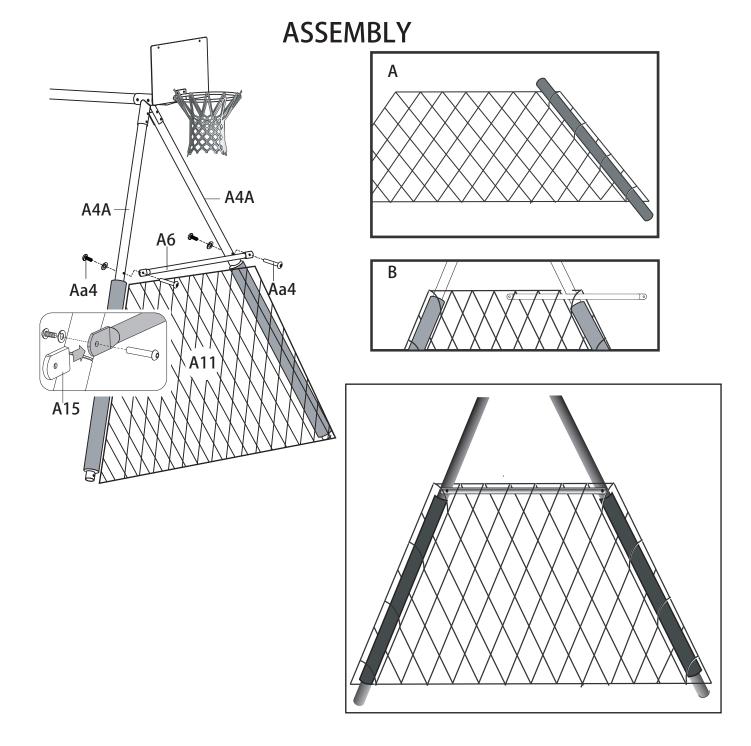

Step 7


Spread out the Soccer Net (A11) flat on the ground and find each end. Starting at the Narrowest end, weave the Soccer Net (A11) up both Padded Legs (A4A) as shown in Fig. A. Slide a Crossbar Cap (A15) over each end of the Slide Mounting Bar (A5). Then weave the Crossbar (A6) Through the top of the Soccer Net (A11) as shown in Fig. B. Secure the Crossbar (A6) to the Padded Legs (A4A) using two Binder Post and Bolt Sets (Aa4). Then tighten the Binder Post and Bolt Sets (Aa4) using the 5mm Allen Wrench provided.

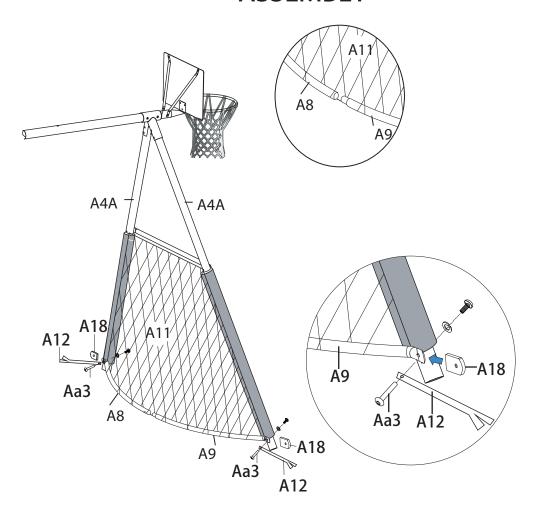

- Weave the Net Bar A (A8) halfway through the Soccer Net (A11) on the left side. Weave the Net Bar B (A9) halfway through the Soccer Net (A11) on the right side. Insert the tube of the Net Bar B (A9) into the Net Bar A (A8), ensure that the metal tab snaps into place.
- Secure an Anchor (A12) to the Net Bar A (A8) and Padded Leg (A4A) using a Binder Post and Bolt Set (Aa3) and Net Bar Cap (A18). Tighten the Binder Post and Bolt Set (Aa3) and Net Bar Cap (A18) using the 5mm Allen Wrench provided.
- Secure an Anchor (A12) to the Net Bar B (A9) and Padded Leg (A4A) using a Binder Post and Bolt Set (Aa3) and Net Bar Cap (A18). Tighten the Binder Post and Bolt Set (Aa3) and Net Bar Cap (A18) using the 5mm Allen Wrench provided.


Step 9

- Using the Velcro straps, attach a Triangle Net (A10) to the Legs (A4) and Slide Mounting Bar (A5).
- Using the Velcro straps, attach another **Triangle Net (A10)** to the **Padded Legs (A4A)** and **Crossbar (A6)** Using the Veclro straps.

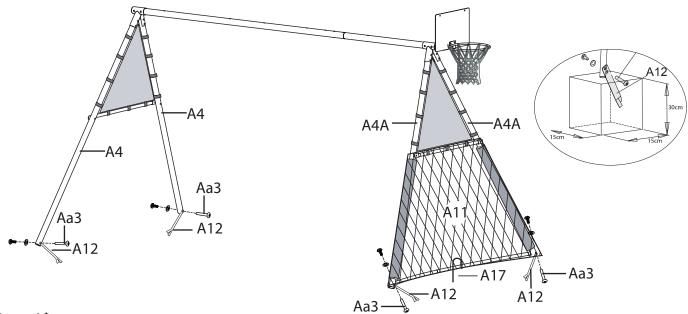


Step 1\$


- Attach Anchors (A12) to the ends of both Legs (A4) and Padded Legs (A4A).
- Secure the Soccer Net (A11) with the Net Anchor (A17).
- For proper installation, the **Anchors (A12)** must be cemented into the ground. Dig a 15 x 15 x 30 cm hole at each leg. Pour cement into the hole and place the **Anchor (A12)** at a 5 degree angle, towards the inside of the Playground. Do not use until cement has dried.

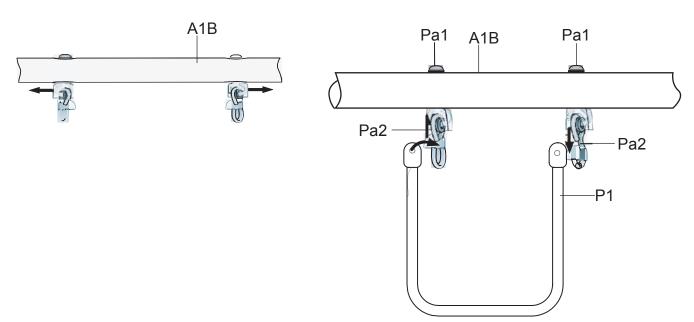



- Attach the Trapeze Tube (P1) to the two pairs of Eye Bolts (Pa2) attached to the Top Bar (A1B).
- NOTE: Place the Trapeze Tube (P1) in the middle set of Eye Bolts (Pa2).

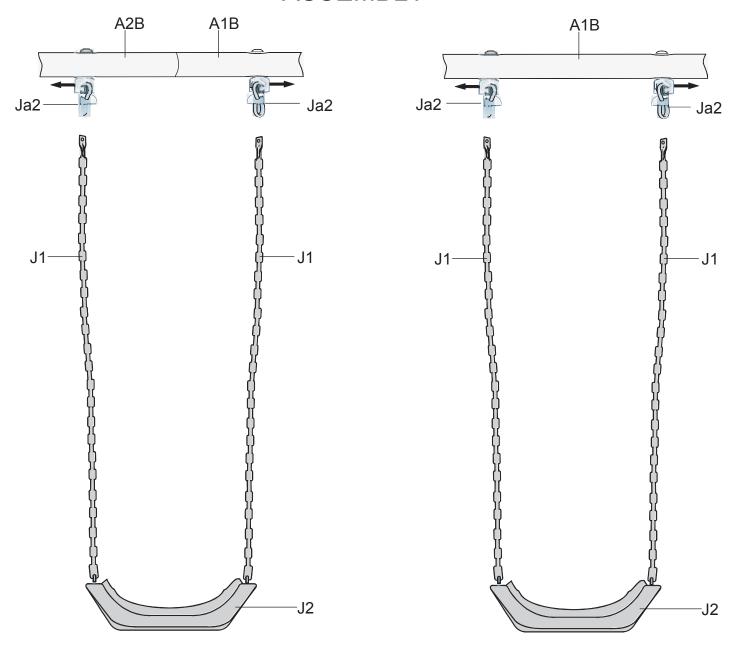

- Attach a Swing Seat (J2) and two Swing Chains (J1) to the Eye Bolt Sets (Ja2) on Top Bar (A1B) and Top Bar (A2B).
- Attach a Swing Seat (J2) and two Swing Chains (J1) to the Eye Bolt Sets (Ja2) on Top Bar (A1B).

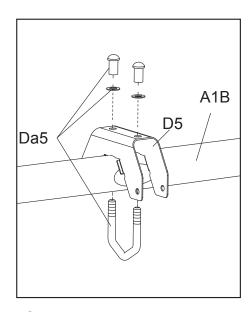


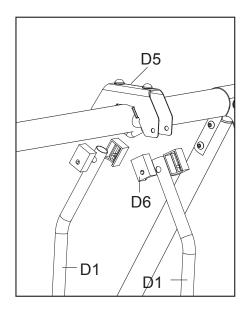

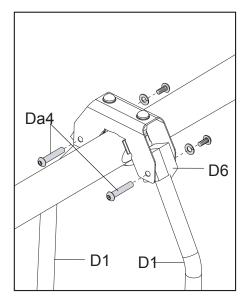


Step 13

- Attach the Glider Attachment (D5) onto the Top bar (A1B) with two Glider Bolt Sets (Da5). Tighten the Glider Bolt Sets (Da5) using the 5mm Allen Wrench provided.
- Attach the two Glider Vertical Poles (D1) and four Glider Vertical Pole Caps (D6) onto the Glider Attachment (D5) with two Binder Post & Bolt Sets (Da4). Tighten the Binder Post & Bolt Sets (Da4) using the 5mm Allen Wrench and 5mm Allen Wrench with Phiilips Screwdriver provided.

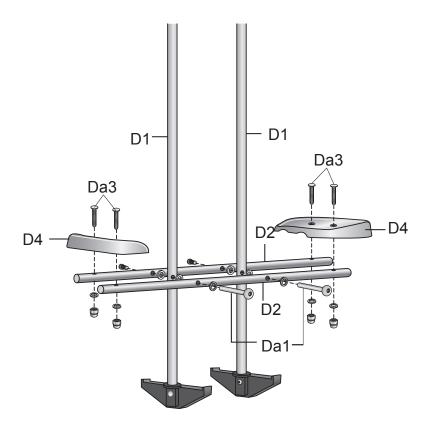


- Attach a Glider Horizontal Pole (D2) to each side of the Glider Vertical Poles (D1) using two Binder Post and Bolt Sets (Da1). Tighten the Binder Post and Bolt Sets (Da1) using the 5mm Allen Wrench provided.
- Attach a Glider Seat (D4) to both sides of the two Glider Horizontal Poles (D2) using the Bolt Sets (Da3). Tighten the Bolt Sets (Da3) using the 10, 13 mm Wrench provided.

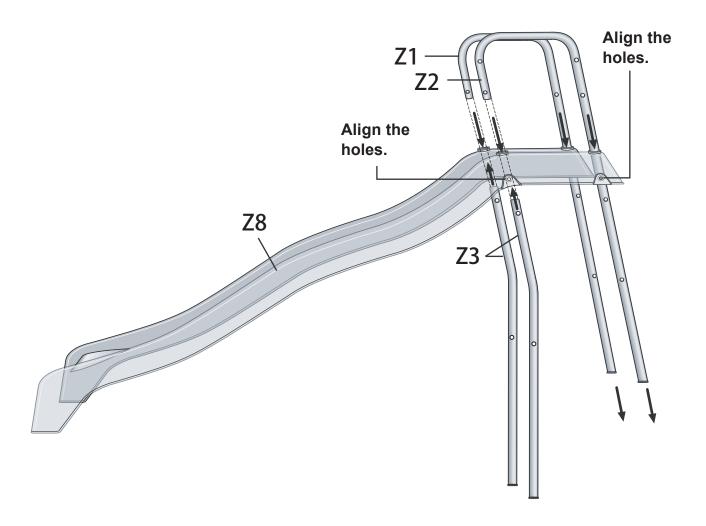


Step 15

- Insert the longer ends of the Slide Ladder Support Tube (Z1) and Slide Ladder Connecting Tube (Z2) into the holes on the rear end of the Slide (Z8) and align the holes.
- Insert both Slide Leg Tubes (Z3) into the holes on the front end of the Slide (Z8) and align the holes.

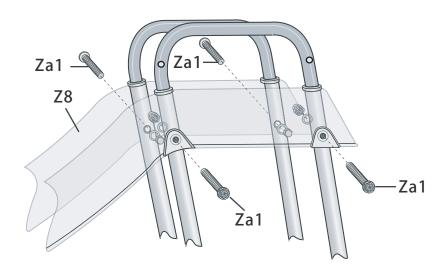


Step 16

• Secure the Slide (Z8) using the four Bolt sets (Za1). Then tighten using the 10, 13 mm Wrench provided.

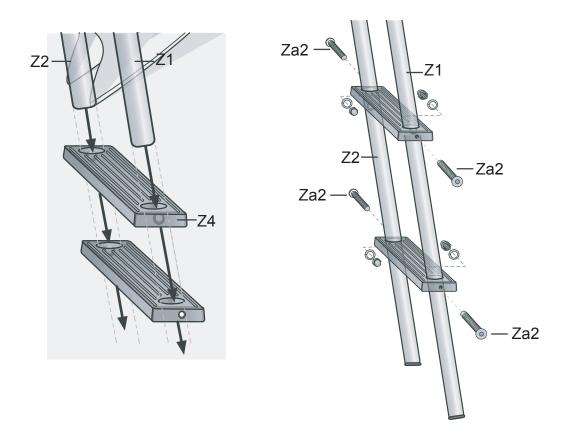


- Slide the two Slide Ladder Steps (Z4) up the bottom ends of the Slide Ladder Support Tube
 (Z1) and Slide Ladder Connecting Tube (Z2). Align the holes of the Slide Ladder Steps (Z4) with
 the TOP and BOTTOM set of holes on the Slide Ladder Support Tube (Z1) and Slide Ladder
 Connecting Tube (Z2).
- Secure the Slide Ladder Steps (Z4) using four Bolt Sets (Za2) by 5mm Allen Wrench and 10, 13 mm Wrench provided.

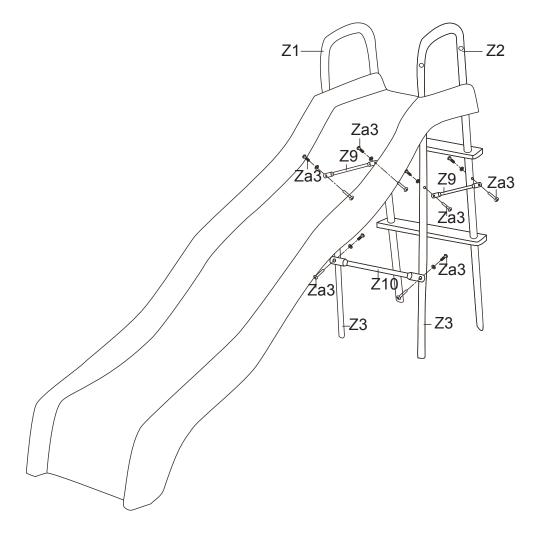

Step 18


- Attach a Slide Ladder Support Tube Cross Bar (Z9) onto each side of the ladder using a Binder Post and Bolt set (Za3). Tighten Binder Post & Bolt Set (Za3) using the 5mm Allen Wrench and 5mm Allen Wrench with Phillips Screwdriver provided.
- Attach a Slide Leg Cross Bar (Z10) to the front of the ladder using two Binder Post and Bolt Sets (Za3). Tighten Binder Post & Bolt Set (Za3) using the 5mm Allen Wrench and 5mm Allen Wrench with Phillips Screwdriver provided.

SECURELY TIGHTEN ALL BOLTS ON THE SLIDE

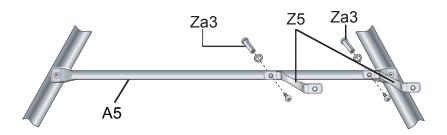


Step 18

 Attach two Connecting Plates (Z5) to the Slide Mounting Bar (A5) with two Binder Post and Bolt Sets (Za3). Tighten Binder Post & Bolt Set (Za3) using the 5mm Allen Wrench and 5mm Allen Wrench with Phillips Screwdriver provided.

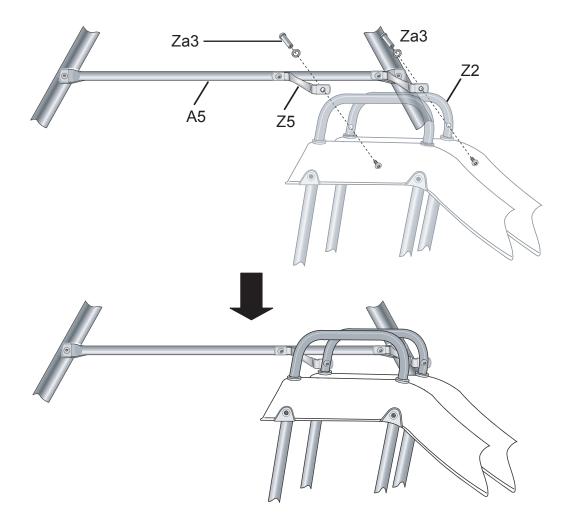

Step 20

 Attach the Slide Ladder Connecting Tube (Z2) onto the Slide Mounting Bar (A5) using two Connecting Plates (Z5) and two Binder Post and Bolt Sets (Za3).
 Tighten Binder Post & Bolt Set (Za3) using the 5mm Allen Wrench and 5mm Allen Wrench with Phillips Screwdriver provided.

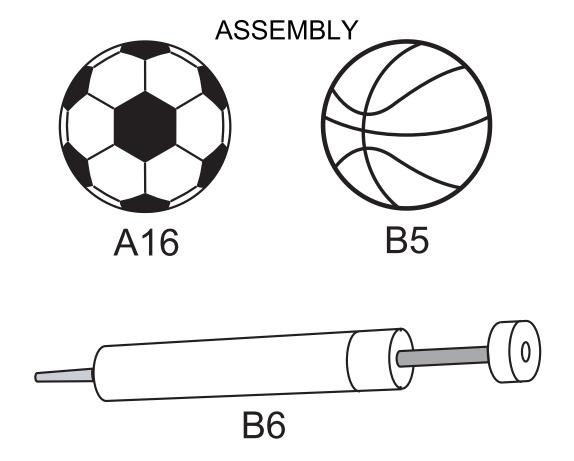

Step 21

• Use inflation needles stored in the handle of the Air Pump (B6) to pump up the Basketball (B5) and Soccer Ball (A16)

WARRANTY

MANUFACTURER'S LIMITED WARRANTY

Paradigm Health & Wellness warrants to the original purchaser that this product is free from defects in material and workmanship when used for the purpose intended, under the conditions that it has been installed and operated in accordance with Paradigm's Owner's Manual. Paradigm's obligation under this warranty applies to the following:

COMPONENTLENGTH OF WARRANTYStructural Frame2 years FOR HOME USE ONLYAll Other Components180 days FOR HOME USE ONLY

Exclusions from Warranty Coverage:

Paradigm does not warrant against and is not responsible for, and no implied warranty shall be deemed to cover, any product failure, product malfunction, or damages attributable to:

- 1. Improper installation and/or failure to abide by Paradigm's installation guidelines;
- 2. Use of this product beyond normal home use, or in an application for which it was not designed;
- 3. Cosmetic items such as scratches, dents or discolorations;
- 4. Damage caused by normal wear and tear, vandalism, accidental or by animals;
- 5. Any act of Nature (such as fire, flooding, snow, ice, hurricane, earthquake, lightning or other natural disaster), environmental condition (such as air pollution, mold, mildew, etc.), or staining from foreign substances (such as dirt, grease, oil, etc.);
- 6. Normal weathering due to exposure to sunlight, weather and atmosphere which can cause colored surfaces to, among other things, flake, chalk, accumulate dirt or stains.
- 7. Improper operation, alteration, handling, storage, abuse or neglect of the products.

Paradigm, using its sole discretion, will either repair or replace free of charge any part(s) proven to be defective under normal home use. Any repair or replacement shall provide no new warranty coverage, but shall retain only the remaining portion of the original product's warranty. This warranty is offered only to the original purchaser and is not transferable. Proof of original purchase is required.

Ordering Replacement Parts

Replacement parts can be ordered by emailing our customer service department:

Service@paradigmhw.com

Open Daily 8:00 AM - 5:00 PM (PST).

When ordering replacement parts please have the following information ready:

- 1. Owner's Manual
- 2. Model Number
- 3. Description of Parts
- 4. Part Number
- 5. Date of Purchase

PARTS REQUEST FORM

Paradigm Health & Wellness, Inc.

EMAIL THIS FORM WITH YOUR RECEIPT OF PURCHASE TO **Service@paradigmhw.com**

NAME:				
ADDRESS:				
CITY:		STATE:	ZIP:	
TELEPHONE:	(Day)			
	(Night)			
SERIAL#:				
MODEL#:				
PURCHASE DA	TE:			
PLACE OF PUR	RCHASE:			

PART #	DESCRIPTION	QTY

[&]quot;YOUR ORDER WILL BE PROCESSED WITHIN 3 BUSINESS DAYS"

^{*}This form can also be faxed to #: 626-810-2166